



For Earth, For Life  
Kubota

Z

KUBOTA ZERO-TURN MOWER  
*KommanderPRO*

Z400 Series Z411/Z421

Designed for the residential user seeking high levels of comfort and convenience, and the professional user demanding superior durability and performance.



\*This information is sourced from overseas and may not necessarily apply locally. It is essential that you confirm specifications and other information with your local Kubota dealer.

# Z400 Series Z411/Z421

*Comfort and Convenience, durability and performance.  
It's everything you want in a zero-turn mower.*

## *Kommander* PRO

Residential users require high levels of comfort and convenience. Professional users demand superior durability and performance. Both want easy operation and top level performance to handle even the most challenging mowing tasks. The Z400 Series of zero-turn mowers delivers all that and more, including powerful engines matched with rugged transmissions, smooth operation levers, and, of course, Kubota's reputation for outstanding quality and durability.

### Warranty\*

Residential : 4 years / 500 hours

Commercial : 2 years / Unlimited hours

\*Please see the Kubota Owner's warranty information guide for full details.





*\*Photo shown with optional Operator Controlled Discharge Chute.*



# PERFORMANCE & EASY OPERATION

The Z400 Series boasts the kind of performance found only in commercial-grade mowers, as well as the easy operation that residential and professional users alike can appreciate.




## POWERFUL ENGINES

The Z400 Series comes equipped with powerful KAWASAKI engines that provide the torque you need to power through tall grass and rugged environments.

## RUGGED TRANSMISSION

Power from the engine is delivered to the wheels through rugged, Hydro-Gear® Commercial ZT3600® transmission.

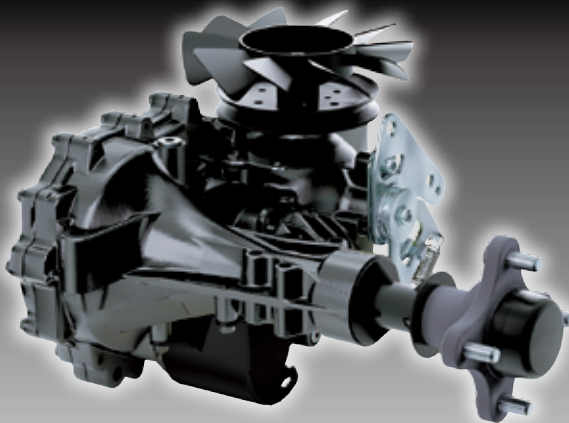

## PRECISION ADJUSTMENT

A simple twist of a dial lets you adjust the cutting height in precise 1/4" increments.



## PARKING BRAKE

A foot pedal locks the brake so the unit can't move, ensuring safe and secure parking.



## K-LIFT Mechanical One Push Deck Lift Pedal

The K-Lift pedal lets you quickly and easily adjust the cutting height without leaving your seat. Simply press the pedal and turn the adjustment dial!

# 16.0 km/h TRAVEL SPEED

## FOLDABLE ROPS

The ROPS on the Z400 Series mowers meets ISO 21299 specifications to ensure safe and efficient operation. The ROPS easily folds down to allow the mower to pass under low obstructions, as well as permits easier storage in a garage or shed.



**24" Rear Tyres**  
Big tyres mean a softer ride.

*\*Photo shown with optional Operator Controlled Discharge Chute.*

## LOW PROFILE TYRE

The Z400 Series' new wide low-profile tyres not only look good, they provide better traction for all types of mowing tasks. They also have a larger footprint that reduces ground compaction as well as turf damage during turns.



**1** Push and release the pedal to raise the deck



**2** Use the dial to adjust the cutting height



**3** Push and release the pedal again to lower the deck

# COMFORT AND CONVENIENCE

Designed for performance, the Z400 Series also offers a wealth of comfort and convenience features to keep you feeling fresh and working longer.

## 12V POWER OUTLET

Charge your phone or other accessory while mowing the lawn. The Z400 also has an integrated smart phone holder.



*\*The mobile phone, wiring, and charger are for illustration purpose only and not supplied.*

## HIGH BACK SUSPENSION SEAT & 152 mm SLIDE SEAT

Soft and roomy, the high back suspension seat will keep you comfortable even on those extra-long mowing jobs. The seat slides a full 152 mm forward and back, letting you find just the right position for maximum personal comfort.



## 127 mm DEEP WELDED MOWER DECK

This steel welded mower deck provides outstanding, professional-level cutting performance. A reinforced spindle mount area improves durability.



## CUP HOLDER

Integrated cup holder ensures that your drink is always handy, so you can stay on the job longer between breaks.

## LARGE FUEL TANK

The large, 25.7-litre fuel tank keeps the Z400 Series mowing for more than 6 hours between refueling stops. (depending on conditions)





## WIDE FOOT PAN

There's plenty of legroom up front, thanks to a wide foot pan. It also makes entry and exit a snap.

## SMOOTH OPERATION LEVERS

The operation load of the dual operation levers can be adjusted to each operator's needs to provide smooth, precise control and less fatigue at the end of the day. The damper force can be easily adjusted to ensure optimum comfort for every operator.

## ERGONOMIC CONTROL LAYOUT

All controls are ergonomically arranged for quick identification and simple operation, with most controls on the right side for faster, easier access.



*\*Photo shown with optional Operator Controlled Discharge Chute.*

# Specifications

				KUBOTA		
Model				Z411KW-48-AU	Z421KW-54-AU	
<b>Engine</b>	Model			GH7302V	GH7301V	
	Type			Air cooled 2 cylinders petrol engine		
	Engine Gross power	HP		22.0	24.0	
	Total displacement	cu.in. (cc)		44.3 (726)		
	Starting system			Key switch		
<b>Dimensions</b>	Overall length	mm		2055		
	Overall width	w/ mower	mm	1552		
		w/o mower	mm		1236	1710
	Overall height	w/ ROPS (upright)	mm		1772	
		w/o ROPS (folded)	mm		1265	
<b>Wheelbase</b>			mm			
<b>Tread/Tyre</b>	Tread	Front	mm	944		
		Rear	mm	1000		
	Tyre size	Front tyre	mm	13 × 5.0 – 6, Smooth pneumatic		
		Rear tyre	mm	24 × 9.5 –14, Low profile tyre		
<b>Weight (w/ mower)</b>			kg	394	400	
<b>Transmission</b>			Hydro-Gear® Commercial ZT3600®			
<b>Transmission system</b>			2-HST w/Gear reduction			
<b>Speed control</b>			2-hand lever			
<b>Travelling speed range</b>	Forward	km/h		0 – 16.0		
	Reverse	km/h		0 – 8.0		
<b>Braking system</b>			Cog style parking lock / Foot pedal			
<b>PTO</b>	Type			Belt drive		
	Clutch type			Electric clutch		
	PTO brake			Dry disc		
<b>Mower deck</b>	Model			RCK48P-400Z	RCK54P-400Z	
	Mower deck type			Side discharge		
	Mower lift system			Mechanical / Foot pedal		
	Deck depth	in. (mm)		5.0 (127)		
	Belt type			Belt drive		
	Deck steel thickness	in. (mm)		0.135 (3.4)		
	Anti scalp roller			Rigid		
	Cutting width of mower	in. (mm)		48 (1219)	54 (1372)	
	Number of blades			3		
	Cutting height	in. (mm)		1.5 – 5.0 (38 – 127)		
	Mounting system of mower			Parallel linkage		
	Blade tip speed	FPM (m/s)		18800 (95.5)	18700 (95.0)	
<b>Seat</b>			Suspension seat			
<b>Engine stop system</b>			Key stop			
<b>Fuel tank capacity</b>			ℓ			
<b>Battery</b>			U1 (12V, RC : 45min, CCA : 300, CA : 410)			
<b>Generator capacity</b>			Amp			
<b>Hour meter</b>			15A			
<b>Fuel gauge</b>			Standard			
			Sight window			

\*These Kawasaki engines have been tested in accordance with SAE J1995, verified by TÜV Rheinland Group, and certified by SAE International. The gross power ratings of these engines were determined by using measurements according to SAE J1995 which were witnessed by SAE-approved witnesses from TÜV Rheinland Group. Torque ratings of these engines were not certified by SAE. Actual power and torque output will vary depending on numerous factors, including, but not limited to, the operating speed of the engine in application, environmental conditions, maintenance, and other variables.\*

\*\*Power (hp) specifications for individual gasoline engine models are rated pursuant to Society of Automotive Engineers (SAE) J1940 or J2723 based on gross output testing performed in accordance with SAE J1995 without the air cleaner and muffler. Gross engine hp will be higher than actual engine power which is affected by accessories, application, engine speed, ambient operating conditions and other factors. The gross engine horsepower information is for comparison purposes only.

The company reserves the right to change the above specifications without notice.

This brochure is for descriptive purposes only. Please contact your local Kubota dealer for warranty information.

For your safety, Kubota strongly recommends the use of a Rollover Protective Structure (ROPS) and seat belt in almost all applications.

## Attachment & Option Kit



### • Grass Catcher

The optional 7 bushels (250 liters) grass catcher can be attached and detached without ever requiring the use of any tools.



- Mulching Kit
- LED Work Lights
- OCDC
- Maintenance Lift Kit

# Kubota

©2017 Kubota Corporation

### Kubota Australia Pty Ltd

25-29 Permas Way, Truganina VIC, 3029 Australia  
 Freecall: 1800-334-653  
 Email: sales@kubota.com.au

Web Site: <http://www.kubota.com.au>

### CB Norwood Distributors Ltd

888 Tremaine Avenue, Palmerston North, 4440 New Zealand  
 Tel: 06-356-4920  
 Email: info@norwood.co.nz

Web Site: <http://www.kubota.co.nz>

